



Steps to configure
Linksys - PAP2 Analog Telephone Adaptor

Configuration Guide



LINKSYS[®]
A Division of Cisco Systems, Inc.

Overview

This guide shows how to configure Linksys PAP2 Analog Telephone Adaptor (ATA) so you can use the Owtalk service. But first you must be an Owtalk subscriber.


Linksys ATA can be available in preconfigured mode, labeled as Owtalk Preconfigured on the surface of the packaging box. Under the preconfigured mode, all Owtalk SIP account information are pre-programmed, you don't need to go through the following procedures. Please refer to Appendix A on how to activate an Owtalk preconfigured device.

Steps to self-configure Linksys ATA

- 1** Sign up for Owtalk at <http://www.owtalk.com> to get your self-configuration information for Linksys ATA.
- 2** Plug the power cord and connect the WAN port on the back of the ATA to your cable/ADSL modem, router, or broadband Internet connection.
- 3** The factory default network setting of most of the ATA is set as DHCP mode, i.e. the device obtains the IP address automatically from the network. Follow the steps below if your ATA is in DHCP mode. Otherwise please refer to the device user manual on how to configure your device to connect to a LAN or Internet under Static IP or PPPoE mode.
- 4** To obtain the IP address of the Analog Telephone Adaptor PAP2, press **110#** on your traditional landline phone after connected to the adaptor to get your IP address.




- 5 Open Internet Explorer (or any other) web browser on your computer. Enter the IP address of the ATA in the address field. For example, if it is 192.168.0.109, please type **http://192.168.0.109** in the address field.
- 6 A login screen will appear. Leave the User Name Field blank. Enter **admin** in the Password field. Then click **OK** button.
- 7 Click **Line 1** to enter the SIP Configuration. The configuration information is available in the self-configuration tab in Owtalk after sign-up or click **View SIP Account Configuration** in Owtalk **My Account** page.
 - Fill in the 10-digits Owtalk SIP User Name in the field of Display Name, User ID and Auth ID.
 - Fill in the Owtalk SIP Password in the field of Password.
 - Fill in the Owtalk SIP Proxy/Server in the field of Proxy.

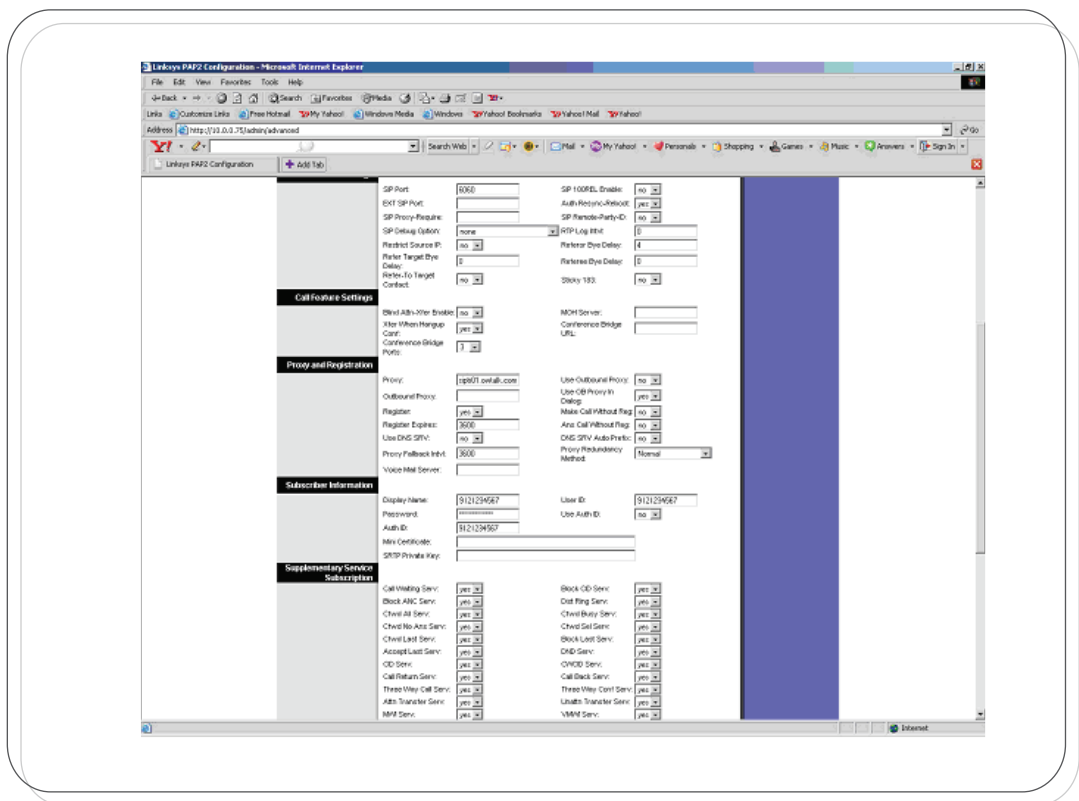

8 The SIP port number is set at **6060**. For the remaining tabs, you can accept the default settings, or you change them to suit your setup.

9 Click **Save Settings** to enable the settings.

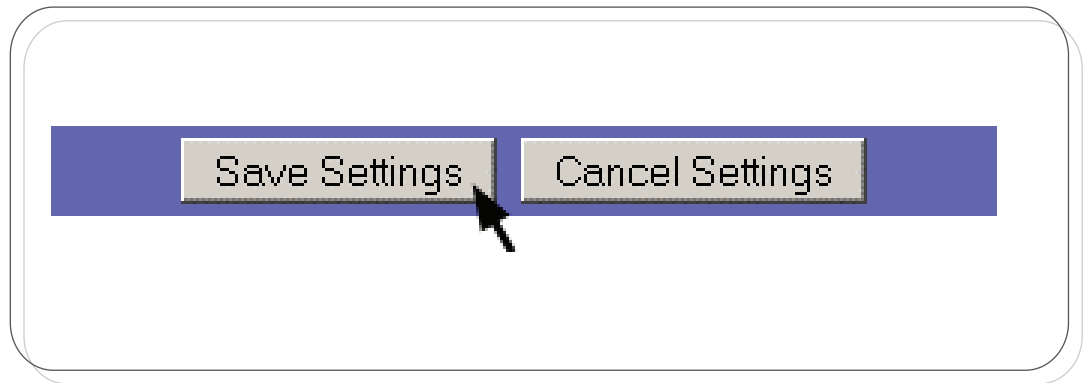

10 After the ATA set up procedure is complete, the device is ready for use and you can now receive and make outgoing calls.

Appendix A

Owtalk Preconfigured Linksys ATA

To activate your Owtalk preconfigured device, you need to obtain an activation number. Go to **My Account** after sign-up for Owtalk at <http://www.owtalk.com>. Press **Port to Preconfigured** and click **Next** to get the activation number.

Simply dial the activation number after connecting your ATA to your cable/ADSL modem, router, or broadband Internet connection. Your ATA is then all set and ready for use.

The screenshot shows the Owtalk website interface. At the top, it says "Welcome to Owtalk owtalk1004" and "Owtalk Credit balance \$0.01 (Add Credits) | My Account | Logout". The Owtalk logo is prominently displayed. Below the logo is a navigation menu with links: Owtalk Home, Owtalk Out, Owtalk In, Owtalk VAS, Tell a Friend, Store, and Partners. On the left side, there is a "My Account" sidebar menu with the following items: Buy Owtalk Credit, Buy Owtalk In Number, Buy Owtalk Voicemail, Call Record, Call Forwarding, Owtalk for Business, View Your Order History, Account Settings (Change Web Password, Change SIP Password, Change Email Address, Change Currency Display), My Monthly Purchase Limits, Owtalk Directory (Owtalk Out, Owtalk In, Owtalk VAS, Owtalk Store), and Logout. The main content area is titled "Port to Preconfigured". It features a green callout box with a green phone icon and the text: "owtalk1004, your activation number is 005677288. Dial this number from your Preconfigured device." Below this, there is a breadcrumb trail: "My Account → Port to Preconfigured". A blue button reads "I have an Owtalk Preconfigured Device and wish to activate it". Underneath, a paragraph states: "When you activate your Owtalk Preconfigured Device, your Owtalk number and SIP Account information will be replaced with that of your new device." At the bottom of the main content area, there are two buttons: "Next" and "Back".